


## Index

The liniLED® Diffuse Connect 12 can be used with the liniLED® Top Diffuse 12 and the liniLED® Side Diffuse.

DIFFUSE CONNECTOR 90° ANGLE 12	2
DIFFUSE CONNECTOR STRAIGHT 12	3
DIFFUSE EXTENSION CORD 12	4
DIFFUSE CONNECTOR MALE/FEMALE	5
SYMBOLS	6



## liniLED® Diffuse Connector 90° Angle 12

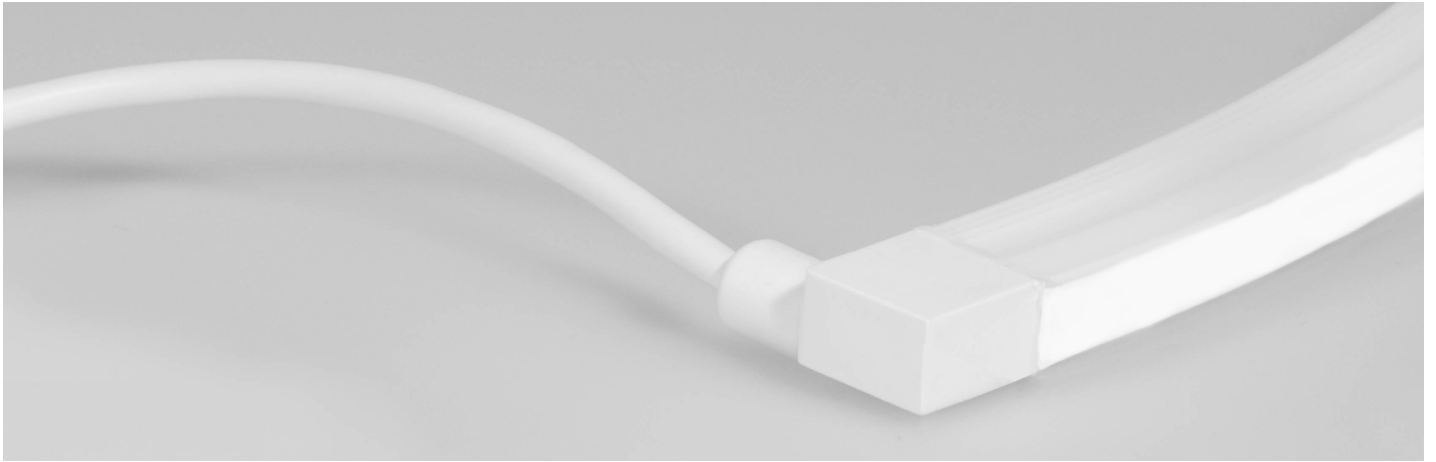


### Product information

Dimensions	L17xW12xH18 mm
Cord length	1 m, 5 m
Degree of protection	IP69K
Colour	White
Material	PVC
Power cord	White, PVC (Cable III)
Included	Pre-assembled
Note	90° angled connectors can be installed in other directions up on request. Please contact us for more information.

Product code	Description
11260	liniLED® Diffuse Connector 90° Angle 12 1 m
11261	liniLED® Diffuse Connector 90° Angle 12 5 m

### Product drawing

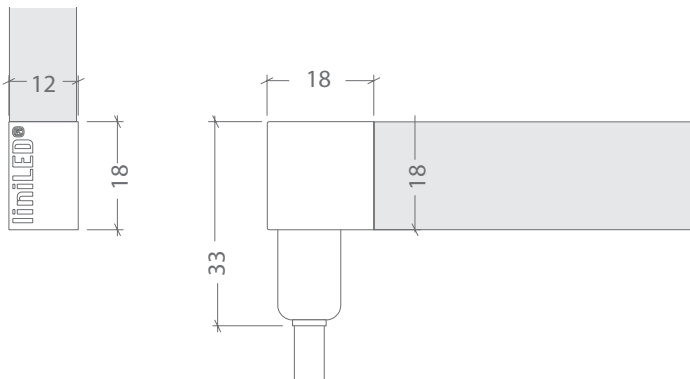

## liniLED® Diffuse Connector Straight 12




### Product information


Dimensions	L17xW12xH18 mm
Cord length	1 m, 5 m
Degree of protection	IP69K
Colour	White
Material	PVC
Power cord	White, PVC (Cable III)
Included	Pre-assembled

Product code	Description
11270	liniLED® Diffuse Connector Straight 12 1 m
11271	liniLED® Diffuse Connector Straight 12 5 m

### Product drawing

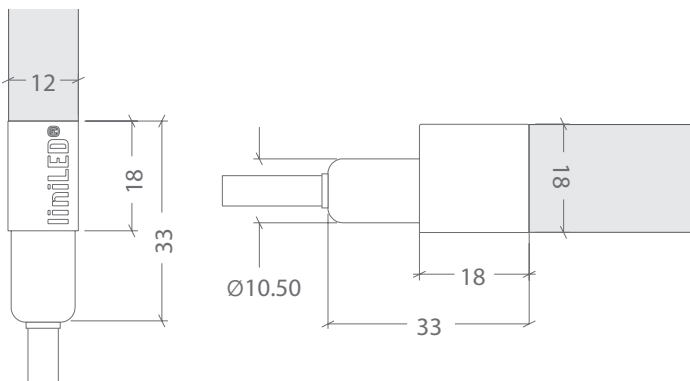

## liniLED® Diffuse Extension Cord Angle/ Straight 12


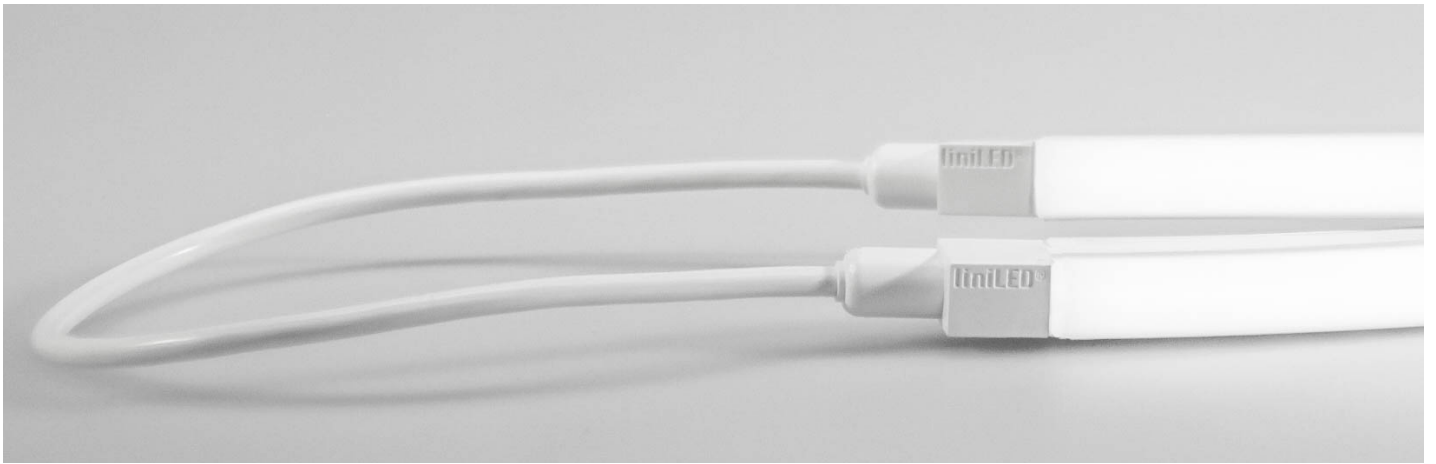


### Product information


Dimensions	L17xW12xH18 mm
Cord length	30 cm
Degree of protection	IP69K
Colour	White
Material	PVC
Power cord	White, PVC (Cable III)
Included	Pre-assembled

Product code	Description
11277	liniLED® Diffuse Extension Cord Angle 12
11279	liniLED® Diffuse Extension Cord Straight 12

### Product drawing

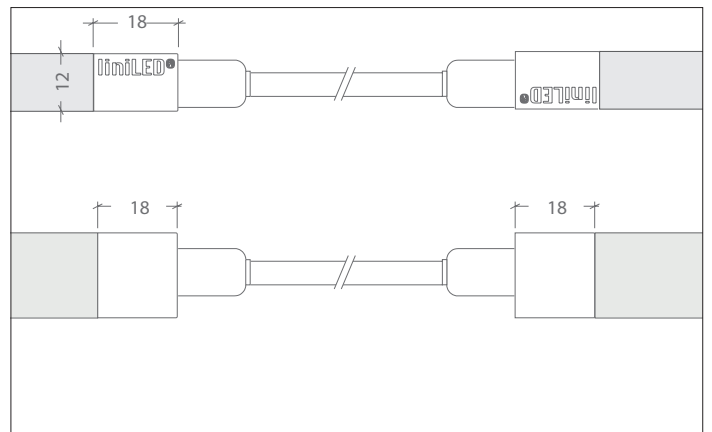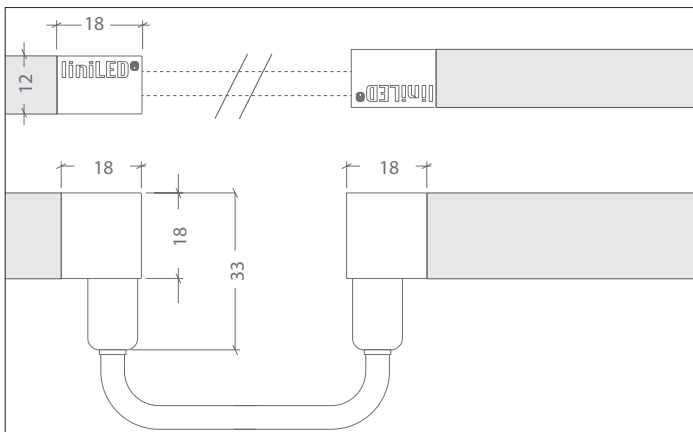


## liniLED® Diffuse Connector Straight 12

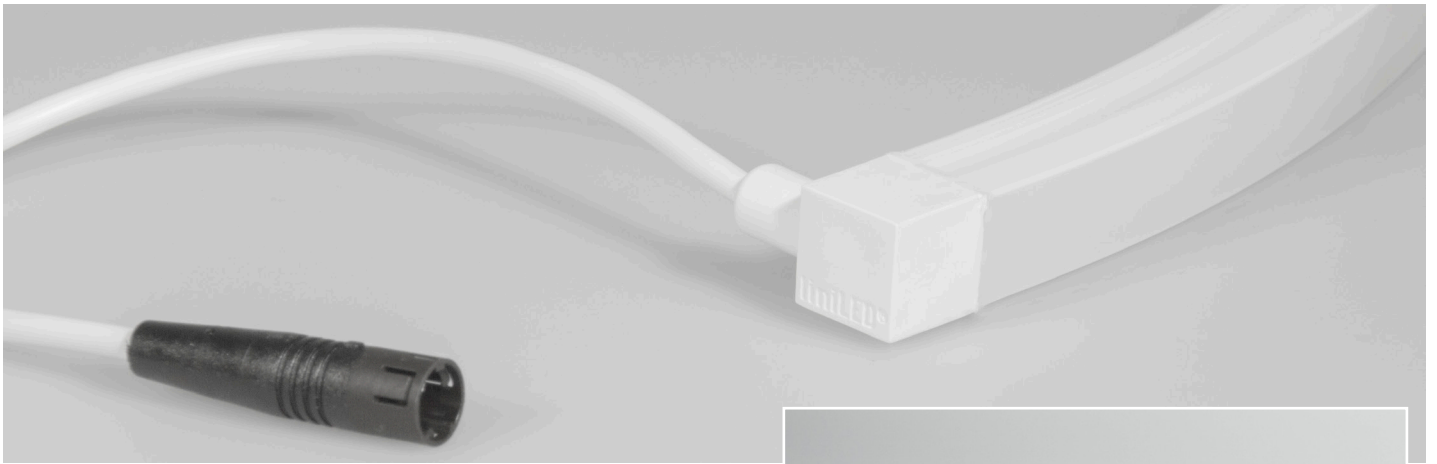


### Product information

Dimensions	L17xW12xH18 mm
Cord length	30 cm
Degree of protection	IP69K (Male/ Female Connector IP67)
Colour	White
Material	PVC
Power cord	White, PVC (Cable III)
Included	Pre-assembled

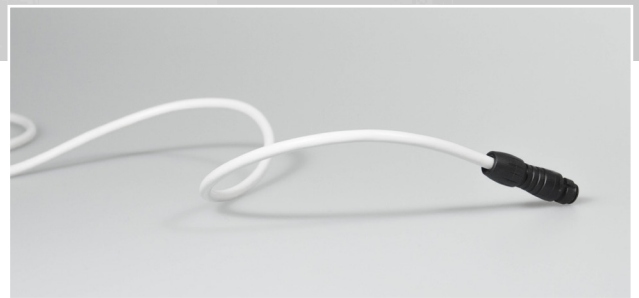





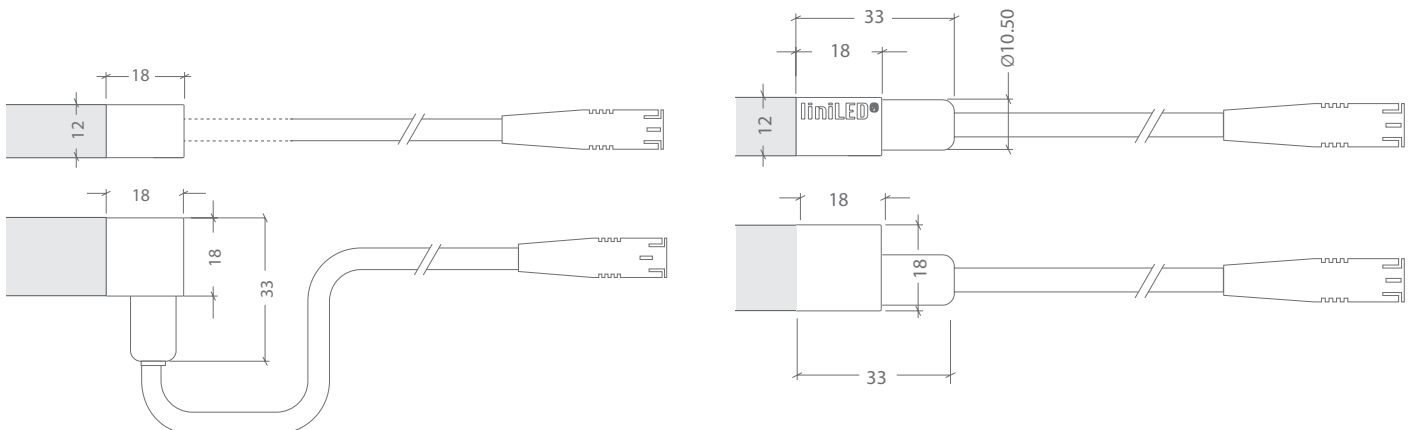






Product code	Description		
11284	liniLED® Diffuse Connector Angle Male 12	11287	liniLED® Diffuse Connector Straight Female 12
11285	liniLED® Diffuse Connector Angle Female 12	11274	liniLED® Connection Cable Female 5 m
11286	liniLED® Diffuse Connector Straight Male 12		

### Product drawing



## Symbols

---

-  Manufacturer's declaration that the product meets the applicable EC directives.
-  Restriction of Hazardous Substances (RoHS): product complies with the RoHS directive and each homogeneous material does not exceed the limits for the materials mentioned under the RoHS directive (Pb, Hg, Cd, Cr6+, PBB and PBDE).
-  Dust-tight, no ingress of dust. Protected against the effects of continuous immersion in water (immersion in water at a maximum depth of 50 metres). Only in combination with the liniLED® Mirror Welded Connector.
-  Dust-tight, no ingress of dust. Protected against close-range high pressure, high temperature spray downs.
-  Protected against impact energy of 5 joules.
-  Product is resistant against ultraviolet (UV) light or sunlight. Non-UV resistant products can degrade or discolor fast when exposed to UV light.
-  Product can be cleaned with normal cleaning agents as specified in the datasheet under 'chemical compliances'.
-  This product can be stored and used below 0 degrees Celsius. Verify the minimum storage and operation temperature in the datasheet for the lowest temperature allowed.
-  This product can be applied inside swimming pool environments. Elements in the air will have no harmful effect on the product. For chemical specifications of these elements see datasheet. Verify the IP rating for proper use.
-  This product is available on request and can be applied submerged in swimming pools and their environment. Disinfectants will have no harmful effect on the product. For chemical specifications of these elements see datasheet. Verify the IP rating for proper use.
-  System guarantee of 5 years when the complete system consist of liniLED® products with the 5 year system warranty logo.